

# PA-6322

The 15" Fanless Slim POS Terminal



- " Fanless Design with Intel® Celeron® J1900 CPU
- " Aluminum Die Casting Backcover
- " Three kinds stand for each application
- " 15" True Flat Touch Screen
- " HDD Easy Maintenance Design
- " Optional MSR / i-Button / Fingerprint / VFD / 2nd Display
- " Optional integrated Wireless LAN
- " Wall-mountable VESA 100 x 100 Standard




System	CPU Support	Intel® Celeron® J1900
	Memory	DDR3L SO-DIMM (1 slot, up to 8GB)
	Network	10/100/1000 Base-T Fast Ethernet
	Power Supply	60~90 Watt power adapter
	Audio	2W speaker
	System Weight	Easy stand with power adaptor approx. 6 kg
	Dimension	382 x 332 x 321 mm(with 45 degrees)
	O.S. Support	Win8 / POSReady7
Storage	SATA	1 x 2.5" HDD or SSD
I/O Ports	USB	on rear 3 x USB 2.0, 1 x USB 3.0 on side bezel 1 x USB 2.0
	Serial Ports	3 + 1 (optional) x RJ45 (all support +5V/12V selectable)
	LAN	1 x RJ45
	VGA	1 x DB15
	Cash Drawer	1 + 1(option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC-in	1 x 4pin DC Power Jack
	Peripheral	Customer Display
Printer		2" or 3" easy loading thermal printer with Auto cutter
MSR & iButton		JIS-I or II, ISO Track1+2+3 (PS/2 interface)
2 <sup>nd</sup> Display		8" or 10.4" LCD
Fingerprint		8-bit grayscale, reader
Display	LCD	15" TFT LCD
	Resolution	1024 x 768
	Brightness	250 cd/m <sup>2</sup>
	Touch Screen	Non-Bezel-free : 5-wire Analog resistive Bezel-Free 5-wire Analog resistive or Projected Capacitive
	Tilt Angel	45~65 degrees with easy stand 0~68 degrees with normal stand 0~50 degrees with printer stand
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0 ~ 35° C
	Storage Temp.	-5 ~ 60° C
	Humidity	20 ~ 90%

\*All information contained in this document is subject to change without prior notice. Please log on [www.protech.com.tw](http://www.protech.com.tw) to acquire latest information.



Power button & USB port

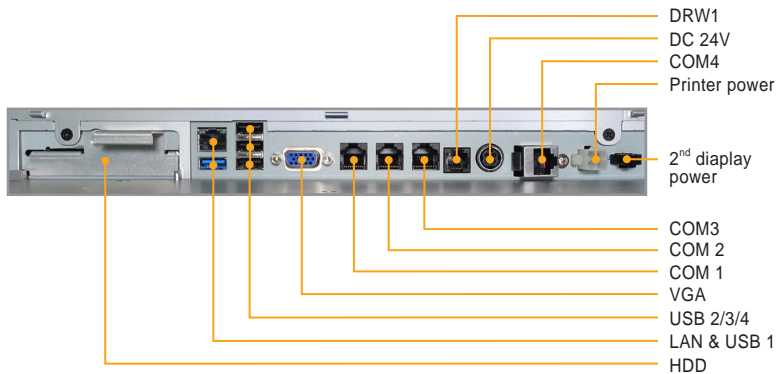



### Ordering Information

Order No	Description
PA-6322RA-A0B	Intel® Celeron® J1900 with Waterproof design and True Flat Resistive Touch,
PA-6322RZ-21A	DDR3 2GB memory /2.5" HDD
PA-6322RZ-41B	MSR, JIS-I or II, ISO Track1+2+3 (PS/2 interface)
PA-6322RZ-51B	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
Color	Black
OS	Win8, POSReady7

### Applications




- " Hospitality
- " Foodservice

Easy Stand






Adjustor angle:  
45~65

Normal Stand



Adjustor angle:  
0~68

Printer Stand

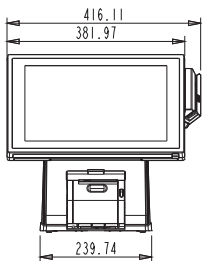

Adjustor angle:  
0~50

unit: mm